




Boggie		5000	6000	7000	8000	9000	10000	12000
Capacity	m ³	5	6	7	8	9	10	12
Total length (A)	mm	6130	6130	6630	6640	6655	6670	6685
Tank length (B)	mm	4420	4445	4420	4440	4470	4490	4500
Height (C)	mm	2735	2825	3375	3475	3575	3675	3525
Tank diameter (D)	mm	1300	1400	1500	1600	1700	1800	1900
Axle / bolts	mm / no.	2x90/10	2x90/10	2x90/10	2x90/10	2x90/10	2x100/10	2x100/10
Weight	kg	4070	4110	4550	4700	4850	5000	5300



Tandem		13000	15000	17000
Capacity	m ³	13	15	17
Total length (A)	mm	7120	7175	7400
Tank length (B)	mm	5390	5390	5550
Height (C)	mm	3675	3875	3985
Tank diameter (D)	mm	1800	1900	2100
Axle / bolts	mm / no.	2x100/10	2x150/10	2x150/10
Weight	kg	5225	5600	6000

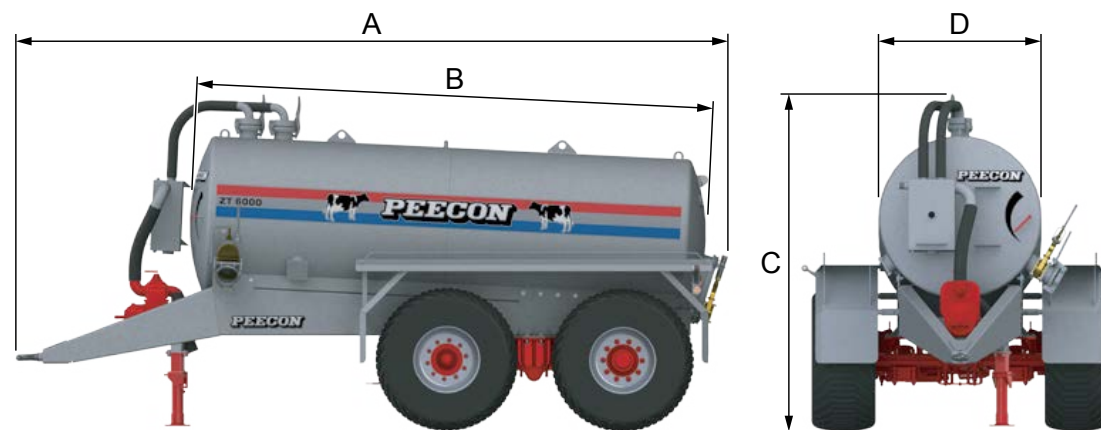

Standard equipment

- Galvanized tank with manhole Ø 600 mm
- Galvanized strengthened undercarriage with low hitch and twistable towing bracket
- Float indicator in the front wall
- Big sight glass at back side
- Pump Jurop PN 58 (6200 litres) (1000 RPM)
- Walterscheid PTO shaft
- Self-cleaning moisture guard
- Hydraulic shut-off valve at the back 6"
- Side connection 6" with fastener at the left front
- Blind flange 6" at the left front and at the right front
- 4 Meter hose 6" with couplings
- Galvanized mud guards + hose storage rack
- Lighting and reflectors
- Hydraulic support
- Sprung action Boggie/Tandem underframe with 2 tracking steered, hydraulically braked axles of which the rear axle hydraulically blocked
- Tyres Peecon 550/60x22.5

Article number	Description	Prices EURO
201-050	TZT 5000 Boggie	22.590
201-060	TZT 6000 Boggie	23.465
201-070	TZT 7000 Boggie	24.345
201-080	TZT 8000 Boggie	25.200
201-090	TZT 9000 Boggie	26.090
201-100	TZT 10000 Boggie	27.030
201-120	TZT 12000 Boggie	28.700
202-130	TZT 13000 Tandem	29.920
202-150	TZT 15000 Tandem	33.970
202-170	TZT 17000 Tandem	37.900

Beware: mention height of towing bracket at order

Optional export models

201-901-153	PVG version Belgium, with hand brake, rear bumper and orange LED side marking, ready for examination	735
201-901-158	TÜV 25 km/h version Germany, air braked axles and TÜV towing bracket, including examination	3.745
201-901-159	TÜV 40 km/h version Germany, air braked axles and TÜV towing bracket, including examination	4.130
201-901-066	ALR air pressure regulator (for air brake system)	805
201-901-156	Homologation version France, equipped with hand brake and fixed DIN towing bracket, ready for examination	800

Optional equipment

201-901-136-002	Pump Jurop PN 84 (1000 RPM) capacity 9000 litres per minute	780
201-901-132-002	Pump Jurop PNE 102 (1000 RPM) capacity 10200 litres per minute	1.105
201-901-133-002	Pump Jurop PNE 122 (1000 RPM) capacity 12200 litres per minute	1.275
201-901-134-002	Pump Jurop PNR 142 (1000 RPM) capacity 14200 litres per minute	2.185
201-901-138-001	Water-cooled vacuum pump Jurop LC 420 (1000 RPM) capacity 12200 litres per minute	3.225
201-901-128-002	Pomp B.P. Star 84/MA (1000 RPM) capaciteit 14800 litre per minuut	1.320
201-901-129-002	Water-cooled pump B.P. WPT 600/MA (1000 RPM) capacity 10400 litres per minute	3.475
201-901-130-002	Water-cooled pump B.P. WPT 720/MA (1000 RPM) capacity 13000 litres per minute	4.235
201-901-131-001	Ring water pump Samson capacity 21000 litres per minute	18.215
201-901-....-	Pump 1000 RPM instead of 540 RPM	175

Article number	Optional equipment	Prices EURO
201-901-139-001	Hydraulic change over of the vacuum pump #	425
201-901-141-001	Moisture guard with extra security	530
201-901-142-001	Silencer for vacuum pump	470
201-901-164-002	Turbo filler 8" driven by hydraulic motor (recommended for deep slurry cellar) #	3.755
201-901-231-001	Wide angle PTO shaft Walterscheid	470
201-901-002-...	Extra side connection 6" with fastener <input type="radio"/> LF <input type="radio"/> RF <input type="radio"/> LB <input type="radio"/> RB	470
201-901-003-...	Extra side connection 8" with fastener <input type="radio"/> LF <input type="radio"/> RF <input type="radio"/> LB <input type="radio"/> RB	930
201-901-004	5 Metres hose 6" instead of 4 metres	110
201-901-005	4 Metres extension hose 6" with male and female coupling	470
201-901-006	4 Metres hose 8" with couplings	470
201-901-009	Suction tube 8" at centre front including electro-hydraulic operation and funnel	6.280
201-901-010	Suction tube 8" mounted at the right side including electro-hydraulic operation	9.385
201-901-011	Suction tube 8" 290° turnable mounted at the back including electro-hydraulic operation	13.350
201-901-012	Exact distributor with big spreading plate	350
201-901-024	Manhole Ø 600 mm on top of tank	895
201-901-079	Sliding fill hatch \varnothing 600 mm on top of tank hydraulically operated #	1.990
201-901-175	Steps to manhole/sliding fill hatch	475
201-901-027	Sight tube Ø 150 mm instead of tank content meter, mounted in front wall of the tank	470
201-901-013	Sprung action draw bar with rubber blocks	1.195
201-901-031	Mechanically forced steered rear axle	1.960
201-901-034	Top pressure cylinder with accumulator #	4.465
201-901-081	Prepared for flow-meter	1.820
201-901-198	Mounting of towing hook on tractor, suitable for hydraulically forced control and top pressure cylinder	945

Optional tyres

201-901-098-...	Peecon 550/60x22.5 (550 x 1230 mm) (10B)	standard
201-901-101-...	Alliance/BKT 600/55R22.5 (600 x 1250 mm) (10B) per 4	3.600
201-901-103-...	Alliance/BKT 600/55R26.5 (600 x 1350 mm) (10B) per 4	4.635
201-901-233-002	Techking 24R20.5 (600 x 1375 mm) (10B) per 4	6.110
201-901-107-...	Michelin 600/55R26.5 (600 x 1350 mm) (10B) per 4	5.945
201-901-104-...	Michelin 24R20.5 (600 x 1380 mm) (10B) per 4	7.835
201-901-105-...	Alliance/BKT 650/55R26.5 (650 x 1360 mm) (10B) per 4	4.650
201-901-121-...	Alliance/BKT 700/50x26.5 (700 x 1350 mm) (10B) per 4	5.360
201-901-109-...	Michelin 710/50R26.5 Cargo (710 x 1380 mm) (10B) per 4	8.205
201-901-122-...	Alliance/BKT 800/45x26.5 (800 x 1350 mm) (10L) per 4	6.930


Optional equipment for the mounting of injection systems

201-901-014	Adjusted back side of tank + weld-on parts for Peecon lever sytem	1.260
201-901-149	Micro-air regulator for dosage of the slurry	530
201-901-173-001	4-Point lever mechanism single-acting (see page 30)	1.835
201-901-173-004	4-Point lever mechanism Base, Cat. II with series connection (see page 30)	3.265
201-901-173-003	4-Point lever mechanism Profi, Cat. II with electro-hydraulic operation (see page 30)	8.005
201-901-173-005	3 and/or 4-Point lever mechanism Deluxe, Cat. III with pushing cylinders and electro-hydraulic operation (see page 30)	8.975
201-901-161	Lift bars with Walterscheid fast couplers	285
201-901-152-...	Extra electro-hydraulic function applicable with options with # - per function	840

Transport / Slurry Injector Tanks Boggie / Tandem accessories



201-901-139-001

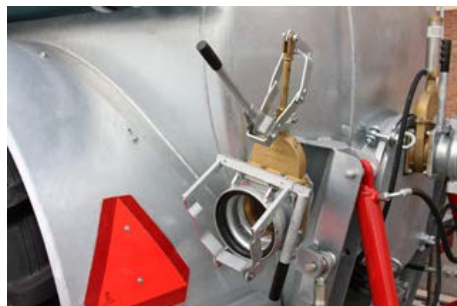

201-901-002-...



201-901-012



201-901-009



201-901-079



201-901-173-003



201-901-173-003



201-901-149



PEECON 550/60x22.5 328



ALLIANCE 600/55R22.5 380



MICHELIN 24R20.5 XS



ALLIANCE 650/55R26.5 380



ALLIANCE 700/50x26.5 328



ALLIANCE 710/50R26.5 390



Transport / Slurry Injector Tanks Boggie / Tandem

The **Peecon Transport / Slurry Injector Tanks Boggie / Tandem** have a capacity from 5,000 litres up to 17,000 litres. These series on 2 axles is characterised by its simple yet highly durable construction. The tanks have been built upon an extremely robust, self-supporting tubular chassis. It is the perfect base to attach a slurry injector, should this be required. The tanks are always galvanised, both inside and out.

As a standard, the **Transport / Slurry Injector Tank Boggie / Tandem** has been provided with a 6" connection with quick coupling on the front left and an extra blind flange on the front left as well as on the front right. At the back, the tank has a 6" hydraulic valve. As a standard, the tanks have hose hooks on the left-hand side. Optionally, these can be placed on the right-hand side, or the tank may be provided with mud guards to bring along extra hoses or other equipment.

As a standard, the tanks are provided with 550/60x22.5 tyres. And, thanks to the possibility of wheel encasing, the tanks may be provided with (almost) any tyres available. An extensive list of options will ensure complete customisation according to your wishes. For example, you may choose to attach a turbo filler, different types of suction arms, various lifting equipment, etcetera. These extra options make this tank suitable for industrial applications as well.

