




Transport / Slurry Injector		3000	4000	5000	6000	7000	8000	9000
Capacity	m ³	3	4	5	6	7	8	9
Total length (A)	mm	5135	5135	5550	5550	5550	5550	5550
Tank length (B)	mm	3410	3420	3845	3875	3900	3945	3950
Height (C)	mm	2380	2470	2675	2795	2915	3030	3140
Tank diameter (D)	mm	1200	1300	1400	1500	1600	1700	1800
Axle / bolts	mm / no.	90/10	90/10	90/10	90/10	90/10	90/10	100/10
Weight	kg	2120	2155	2310	2375	2440	2510	2800



Transport / Slurry Injector		10000	11500	13000
Capacity	m ³	10	11,5	13
Total length (A)	mm	6155	6155	6155
Tank length (B)	mm	4550	4555	4600
Height (C)	mm	3140	3255	3360
Tank diameter (D)	mm	1800	1900	2000
Axle / bolts	mm / no.	100/10	150/10	150/10
Weight	kg	3050	3165	3260

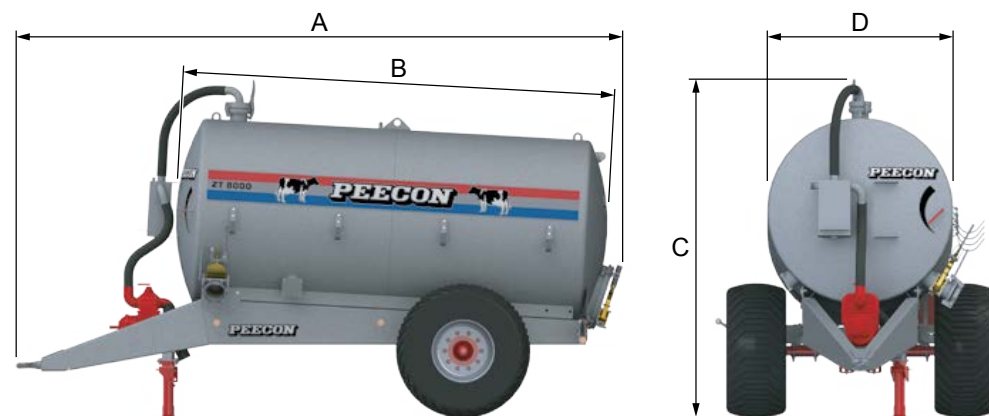

Standard equipment

- Galvanized tank with manhole Ø 600 mm
- Galvanized strengthened undercarriage with low hitch and twistable towing bracket
- Float indicator in the front wall
- Big sight glass at back side
- Pump Jurop PN 58 (6200 litres) (1000 RPM)
- Walterscheid PTO shaft
- Self-cleaning moisture guard
- Hydraulic shut-off valve at the back 6"
- Side connection 6" with fastener at the left front
- Blind flange 6" at the left front and at the right front
- 4 Metres hose 6" with couplings
- Hose hooks at left side
- Lighting and reflectors
- Hydraulic support
- Hydraulically braked axle
- Tyres Peecon 550/60x22.5

Article number	Description	Prices EURO
200-030	TZT 3000	10.545
200-040	TZT 4000	11.825
200-050	TZT 5000	12.895
200-060	TZT 6000	13.415
200-070	TZT 7000	14.145
200-080	TZT 8000	15.070
200-090	TZT 9000	15.900
200-100	TZT 10000	16.815
200-115	TZT 11500	17.385
200-130	TZT 13000	17.935

Optional export models

200-901-153	PVG version Belgium, with hand brake, rear bumper and orange LED side marking, ready for examination	735
200-901-154	TÜV 25 km/h version Germany, air braked axle and TÜV towing bracket, including examination	2.585
200-901-155	TÜV 40 km/h version Germany, air braked axle and TÜV towing bracket, including examination	2.895

Optional equipment

200-901-136-002	Pump Jurop PN 84 (1000 RPM) capacity 9000 litres per minute	780
200-901-132-002	Pump Jurop PNE 102 (1000 RPM) capacity 10200 litres per minute	1.105
200-901-133-002	Pump Jurop PNE 122 (1000 RPM) capacity 12200 litres per minute	1.275
200-901-134-002	Pump Jurop PNR 142 (1000 RPM) capacity 14200 litres per minute	2.185
200-901-138-001	Water-cooled vacuum pump Jurop LC 420 (1000 RPM) capacity 12200 litres per minute	3.225
200-901-128-002	Pomp B.P. Star 84/MA (1000 RPM) capacity 14800 litres per minute	1.320
200-901-129-002	Water-cooled pump B.P. WPT 600/MA (1000 RPM) capacity 10400 litres per minute	3.475
200-901-130-002	Water-cooled pump B.P. WPT 720/MA (1000 RPM) capacity 13000 litres per minute	4.235
200-901-...-...	Pump 540 RPM instead of 1000 RPM	175
200-901-139-001	Hydraulic change over of the vacuum pump #	425
200-901-141-001	Moisture guard with extra security	530
200-901-142-001	Silencer for vacuum pump	470
200-901-164-002	Turbo filler 8" driven by hydraulic motor (recommended for deep slurry cellar) #	3.755
200-901-231-001	Wide angle PTO shaft Walterscheid	470
200-901-002-...	Extra side connection 6" with fastener <input type="radio"/> LF <input type="radio"/> RF <input type="radio"/> LB <input type="radio"/> RB	470

Article number	Optional equipment	Prices EURO
200-901-003-...	Extra side connection 8" with fastener <input type="radio"/> LF <input type="radio"/> RF <input type="radio"/> LB <input type="radio"/> RB	930
200-901-004	5 Metres hose 6" instead of 4 metres	110
200-901-005	4 Metres extension hose 6" with male and female coupling	470
200-901-006	4 Metres hose 8" with couplings	470
200-901-007	Hose hooks at both sides	50
200-901-009	Suction tube 8" at centre front including electro-hydraulic operation and funnel	6.280
200-901-010	Suction tube 8" mounted at the right side including electro-hydraulic operation	9.385
200-901-011	Suction tube 8" 290° turnable mounted at the back including electro-hydraulic operation	13.350
200-901-012	Exact distributor with big spreading plate	350
200-901-024	Manhole Ø 600 mm on top of tank	895
200-901-079	Sliding fill hatch ∇ 600 mm on top of tank hydraulically operated #	1.990
200-901-175	Steps to manhole/sliding fill hatch	475
200-901-013	Sprung action draw bar with rubber blocks	1.195
200-901-015	Galvanized mud boards for one axle	585
200-901-016	Galvanized mud boards + hose storage rack	895
200-901-001-002	Axle 150 mm instead of 100 mm	895
200-901-081	Prepared for flow-meter	1.820
200-901-017	Wheels integrated in tank with mud guards, necessary from tyres Prostor 28.1R26 * and up	1.695

Optional tyres

200-901-098-...	Peecon 550/60x22.5	(550 x 1230 mm) (10B)	standard
200-901-115-...	Alliance/BKT 23.1x26	(580 x 1540 mm) (10B) per 2	1.740
200-901-233-001	Techking 24R20.5	(600 x 1375 mm) (10B) per 2	3.050
200-901-108-...	Michelin 650/65R30.5 Cargo	(620 x 1620 mm) (10B) per 2	5.095
200-901-106-...	Alliance/BKT 28Lx26	(720 x 1630 mm) (10B) per 2	2.025
200-901-099-001	Prostor 28.1R26 *	(720 x 1720 mm) (10B) (up to TZT 8000) per 2	2.550
200-901-113-001	Alliance/BKT 750/60R30.5 *	(750 x 1670 mm) (10B) per 2	5.380
200-901-114-001	Prostor 30.5R32 *	(770 x 1820 mm) (10B) (up to TZT 10000) per 2	3.715
200-901-117-001	Alliance/BKT 30.5R32 *	(770 x 1820 mm) (10B) per 2	5.145
200-901-122-...	Alliance/BKT 800/45x26.5	(800 x 1350 mm) (10B) per 2	3.465
200-901-110-...	Alliance/BKT 850/50x30.5 *	(850 x 1680 mm) (10B) per 2	4.990
200-901-111-...	Michelin 850/50R30.5 Cargo *	(860 x 1630 mm) (10B) per 2	7.120

Optional equipment for the mounting of injection systems

200-901-014	Adjusted back side of tank + weld-on parts for Peecon lever system	1.260
200-901-149	Micro-air regulator for dosage of the slurry	530
200-901-173-001	4-Point lever mechanism single-acting (see page 30)	1.835
200-901-173-004	4-Point lever mechanism Base, Cat. II with series connection (see page 30)	3.265
200-901-173-003	4-Point lever mechanism Profi, Cat. II with electro-hydraulic operation (see page 30)	8.005
200-901-173-005	3 and/or 4-Point lever mechanism Deluxe, Cat. III with pushing cylinders and electro-hydraulic operation (page 30)	8.975
200-901-161	Lift bars with Walterscheid fast couplers	285
200-901-152-...	Extra electro-hydraulic function applicable with options with # - per function	840

Optional equipment for industrial applications (TIT)

200-901-018	Hydraulically tipping tank #	8.925
200-901-052	Manhole Ø 1100 mm hinging instead of Ø 600 mm	1.195
200-901-020	Complete back wall hydraulically operated, manually locked #	5.815
200-901-021	Complete back wall hydraulically operated, hydraulically locked 2x #	11.625
200-901-027	Sight tube Ø 150 mm instead of tank content meter, mounted in front wall of the tank	470
200-901-022	Fortification rings on the outside of the tank (inside of the tank is completely smooth)	895
200-901-023	Stainless steel slide plate inside tank and fortification rings on the outside of the tank	2.670

Transport / Slurry Injector Tanks accessories



200-030



200-901-139-001



200-901-012



200-901-024



200-901-017



200-901-149



200-901-173-001



Transport / Slurry Injector Tanks

The **Peecon Transport / Slurry Injector Tanks** have a capacity from 3,000 litres up to 13,000 litres. The single-axle series is characterised by its simple yet highly durable construction. The tanks have been built upon an extremely robust, self-supporting tubular chassis. It is the perfect base to attach a slurry injector, should this be required. The tanks are always galvanised, both inside and out.

As a standard, the **Transport / Slurry Injector Tank** has been provided with a 6" connection with quick coupling on the front left and an extra blind flange on the front left as well as on the front right. At the back, the tank has a 6" hydraulic valve. As a standard, the tanks have hose hooks on the left-hand side. Optionally, these can be placed on the right-hand side, or the tank may be provided with mud guards to bring along extra hoses or other equipment.

As a standard, the tanks are provided with 550/60x22.5 tyres. And, thanks to the possibility of wheel encasing, the tanks may be provided with (almost) any tyres available. An extensive list of options will ensure complete customisation according to your wishes. For example, you may choose to attach a turbo filler, different types of suction arms, various lifting equipment, etcetera. These extra options make this tank suitable for industrial applications as well.

