



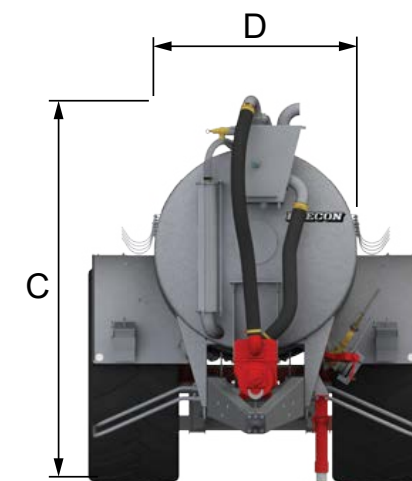

| Euroline (Deluxe) | | 7500 | 8500 | 10000 | 11500 | 13000 | 13000 XL |
|--------------------------|----------------|-------------|-------------|--------------|--------------|--------------|-----------------|
| Capacity | m ³ | 7,5 | 8,5 | 10 | 11,5 | 13 | 13 |
| Total length (A) | mm | 6940 | 6940 | 6940 | 6940 | 6940 | 6940 |
| Tank length (B) | mm | 4500 | 4520 | 4555 | 4555 | 4600 | 5060 |
| Height (C) | mm | 3010 | 3120 | 3225 | 3355 | 3430 | 3335 |
| Tank diameter (D) | mm | 1600 | 1700 | 1800 | 1900 | 2000 | 1900 |
| Axle / bolts | mm / no. | 90/10 | 100/10 | 100/10 | 150/10 | 150/10 | 150/10 |
| Weight | kg | 3500 | 3600 | 3880 | 3960 | 4050 | 4050 |

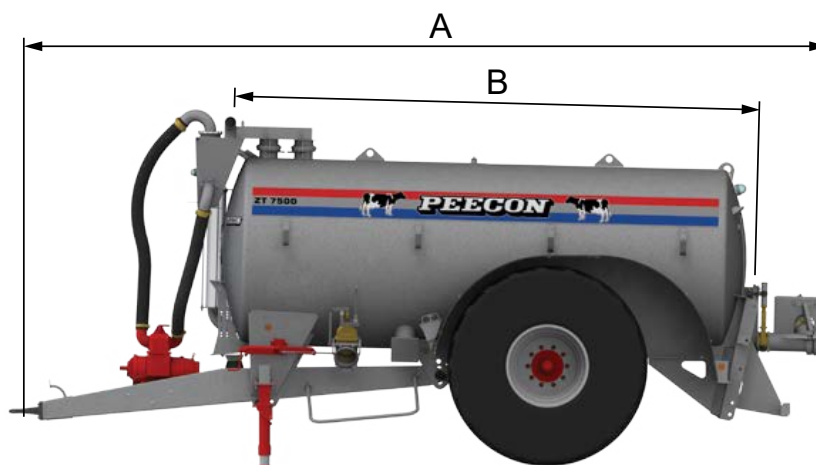

Standard equipment

- Galvanized tank with manhole Ø 600 mm
- Galvanized strengthened undercarriage prepared for Peecon linkage system with low hitch and twistable towing bracket
- Sprung action draw bar with 2 rubber blocks
- Sight tube Ø 150 mm in front wall of the tank
- Big sight glass at back side
- Pump Jurop PN 58 (6200 litres) (1000 RPM)
- Walterscheid PTO shaft
- Silencer for vacuum pump
- Self-cleaning moisture guard
- Hydraulic shut-off valve at the back 6"
- Side connection 6" with fastener at the left front
- Blind flange 8" at the left front and 6" at the right front, left behind and right behind
- 4 Metres hose 6" with couplings
- Hose hooks at left side
- Lighting and reflectors
- Hydraulic support
- Hydraulically braked axle
- Tyres Peecon 550/60x22.5

| Article number | Description | Prices EURO | |
|----------------|--------------------------------------|---------------|---------------|
| | | Base | Deluxe |
| 23.-075 | ZT 7500 Euroline (Deluxe) | 15.055 | 18.890 |
| 23.-085 | ZT 8500 Euroline (Deluxe) | 15.700 | 19.535 |
| 23.-100 | ZT 10000 Euroline (Deluxe) | 16.345 | 20.180 |
| 23.-115 | ZT 11500 Euroline (Deluxe) | 17.810 | 21.645 |
| 23.-130 | ZT 13000 Euroline (Deluxe) | 19.080 | 22.915 |
| 2.-130 | ZT 13000 Euroline XL (Deluxe) | 21.820 | 25.660 |

Optional export models

| | | |
|--------------------|---|--------------|
| 232-901-153 | PVG version Belgium, with hand brake, rear bumper and orange LED side marking, ready for examination | 735 |
| 232-901-154 | TÜV 25 km/h version Germany, air braked axle and TÜV towing bracket, including examination | 2.585 |
| 232-901-155 | TÜV 40 km/h version Germany, air braked axle and TÜV towing bracket, including examination | 2.895 |
| 232-901-066 | ALR air pressure regulator (for air brake system) | 805 |
| 232-901-156 | Homologation version France, equipped with hand brake and fixed DIN towing bracket, ready for examination | 800 |

Optional equipment

| | | |
|------------------------|--|--------------|
| 232-901-136-002 | Pump Jurop PN 84 (1000 RPM) capacity 9000 litres per minute | 780 |
| 232-901-132-002 | Pump Jurop PNE 102 (1000 RPM) capacity 10200 litres per minute | 1.105 |
| 232-901-133-002 | Pump Jurop PNE 122 (1000 RPM) capacity 12200 litres per minute | 1.275 |
| 232-901-134-002 | Pump Jurop PNR 142 (1000 RPM) capacity 14200 litres per minute | 2.185 |
| 232-901-128-002 | Pump B.P. Star 84/MA (1000 RPM) capacity 14800 litres per minute | 1.320 |
| 232-901-...-... | Pump 540 RPM instead of 1000 RPM | 175 |
| 232-901-092-... | Pumpsystem BP Garda 6500 with MEC 8000 + in front and back sprayer 360o reversible + threeway valve # | 5.505 |
| 232-901-092-... | Pumpsystem BP Garda 6500 with MEC 8000 + in front and back tipping sprayer 360o reversible + threeway valve # | 6.055 |
| 232-901-139-001 | Hydraulic change over of the vacuum pump # | 425 |
| 232-901-164-002 | Turbo filler 8" driven by hydraulic motor (recommended for deep slurry cellar) # | 3.755 |
| 232-901-231-001 | Wide angle PTO shaft Walterscheid | 470 |
| 232-901-002-... | Extra side connection 6" with fastener <input type="radio"/> LF <input type="radio"/> RF <input type="radio"/> LB <input type="radio"/> RB | 470 |
| 232-901-003-... | Extra side connection 8" with fastener <input type="radio"/> LF <input type="radio"/> RF <input type="radio"/> LB <input type="radio"/> RB | 930 |

| Article number | Optional equipment | Prices EURO |
|------------------------|---|--------------|
| 232-901-004 | 5 Metres hose 6" instead of 4 metres | 110 |
| 232-901-005 | 4 Metres extension hose 6" with male and female coupling | 470 |
| 232-901-006 | 4 Metres hose 8" with couplings | 470 |
| 232-901-007 | Hose hooks at both sides | 50 |
| 232-901-009 | Suction tube 8" at centre front including electro-hydraulic operation and funnel | 6.280 |
| 232-901-010 | Suction tube 8" mounted at the right side including electro-hydraulic operation | 9.385 |
| 232-901-012 | Exact distributor with big spreading plate | 350 |
| 232-901-024 | Manhole Ø 600 mm on top of tank | 895 |
| 232-901-079 | Sliding fill hatch ∇ 600 mm on top of tank hydraulically operated # | 1.990 |
| 232-901-175 | Steps to manhole/sliding fill hatch | 475 |
| 232-901-001-002 | Axle 150 mm instead of 100 mm (standard up from ZT 11500 Euroline Base) | 895 |
| 232-901-082-001 | Air braked axle in combination with hydraulic brake system | 1.895 |
| 232-901-073 | Air sprung action draw bar | 680 |
| 232-901-074 | Hydraulically movable axle (standard with Euroline Deluxe) # | 515 |
| 232-901-194 | Hydraulically sprung axle (hydraulically movable axle is invalidated) # | 1.110 |
| 232-901-072 | Draw bar hydraulically sprung/adjustable (standard with Euroline Deluxe) # | 1.520 |
| 232-901-015 | Galvanized mud boards for one axle | 585 |
| 232-901-017 | Wheels integrated in tank with mud guards, necessary from tyres Prostor 28.1R26 " and up (std with Euroline Deluxe) | 1.695 |

Optional tyres

| | | |
|------------------------|--|-----------------|
| 232-901-098-... | Peecon 550/60x22.5 (550 x 1230 mm) (10B) | standard |
| 232-901-115-... | Alliance/BKT 23.1x26 (580 x 1540 mm) (10B) per 2 | 1.740 |
| 232-901-099-001 | Prostor 28.1R26 " (720 x 1720 mm) (10B) (up to ZT 8500) per 2 | 2.550 |
| 232-901-113-001 | Alliance/BKT 750/60R30.5 * (750 x 1670 mm) (10B) per 2 | 5.380 |
| 232-901-114-001 | Prostor 30.5R32 * (770 x 1820 mm) (10B) (up to ZT 10000) per 2 | 3.715 |
| 232-901-117-001 | Alliance/BKT 30.5R32 * (770 x 1820 mm) (10B) per 2 | 5.145 |
| 232-901-122-... | Alliance/BKT 800/45x26.5 (800 x 1350 mm) (10B) per 2 | 3.465 |
| 232-901-091 | Alliance/BKT 800/45x26.5 with integrated wheels, total width 2550 mm per 2 | 3.555 |
| 232-901-110-... | Alliance/BKT 850/50x30.5 * (850 x 1680 mm) (10B) per 2 | 4.990 |

Optional equipment for the mounting of injection systems

| | | |
|------------------------|--|--------------|
| 232-901-149 | Micro-air regulator for dosage of the slurry | 530 |
| 232-901-173-001 | 4-Point lever mechanism single-acting (see page 30) | 1.835 |
| 232-901-173-004 | 4-Point lever mechanism Base, Cat. II with series connection (see page 30) | 3.265 |
| 232-901-173-003 | 4-Point lever mechanism Profi, Cat. II with electro-hydraulic operation (see page 30) | 8.005 |
| 232-901-173-005 | 3 and/or 4-Point lever mechanism Deluxe, Cat. III with pushing cylinders and electro-hydraulic operation (page 30) | 8.975 |
| 232-901-162-001 | Slurry chaff-cutter 6" maxi driven by hydraulic motor # | 3.755 |
| 232-901-163-002 | Cutting box FT 4200 L driven by hydraulic motor # | 6.095 |
| 232-901-161 | Lift bars with Walterscheid fast couplers | 285 |
| 232-901-152-... | Extra electro-hydraulic function applicable with options with # - per function | 840 |

Euroline (Deluxe) Slurry Injector Tanks accessories



232-901-132-002



232-901-073



232-901-009



232-901-010



232-901-072



232-901-092



232-901-173-003



232-901-149



Euroline (Deluxe) Slurry Injector Tanks

The **Peecon Euroline (Deluxe) Slurry Injector Tanks** are available in 2 versions: the Basis and the Deluxe. The Deluxe has, as a standard, been provided with a number of options. The tanks have a capacity of between 7,500 and 13,000 litres. All tanks have a self-supporting construction with integrated chassis. This ensures top durability while also being more lightweight than similar tanks with a separate chassis. The tanks are always galvanised, both inside and out.

As a standard, the **Euroline (Deluxe)** has been provided with a 6" connection with quick coupling on the front left and an extra blind flange on the front left, front right, rear left, and rear right. An additional 8" blind flange has, as a standard, been installed on the front left. At the back, the tank has a 6" hydraulic valve and it has been prepared for 4-point lifting equipment. As a standard, the tanks have hose hooks on the left-hand side. Optionally, these can be placed on the right-hand side, or the tank may be provided with mud guards to bring along extra hoses or other equipment. As a standard, the tanks are provided with 550/60x22.5 tyres. And, thanks to the possibility of wheel encasing, the tanks may be provided with (almost) any tyres available.

All tanks have, as a standard, a suspended tow bar. In case of the Basis models, the suspension has been realised by means of rubber blocks, while the Deluxe has, as a standard, been provided with a hydraulically suspended tow bar. In addition, the Deluxe has been provided with a hydraulically adjustable axle to raise or lower the pressure on the towing point. Optionally available tyres can always be fitted on the Deluxe models. An extensive list of options will ensure complete customisation according to your wishes. For example, you may choose to attach a turbo filler, different types of suction arms, various lifting equipment, etc.

